


## Concrete for printing components



1. Crushed stone fraction 2-8 mm — 32,12%;
2. Sand — 32,12%;
3. Cement (CEM II/A-LL 42,5 R or analogue) — 21,42%;

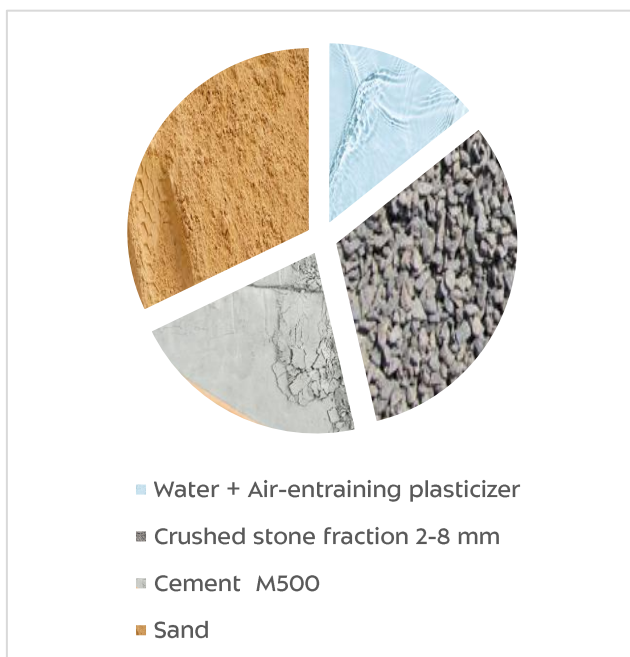

4. Air-entraining plasticizer (Sika Mix Plus light or Schomburg purcrete-bv10 or analogue) — 0,06%;



5. Water — 14,28%;